



Energy Evolved.

Lead Crystal Energy Solutions

Next-generation lead crystal battery systems for a sustainable future. High-performance, high-safety, and 99% recyclable.


**LEAD
CRYSTAL[®]**
BATTERIES



DISCHARGE CURRENT AND END VOLTAGE

Discharge current (A)	End voltage (V)
0.05C or below or Intermittent discharge	5.70
0.05C of current close to it	5.55
0.1C of current close to it	5.40
0.2C of current close to it	5.25
From 0.2C to 0.5C	5.10
From 0.5C to 1C	4.80
From 1C to 3C	4.50
Current in excess of 3C	3.90

CHARGE vs TEMPERATURE

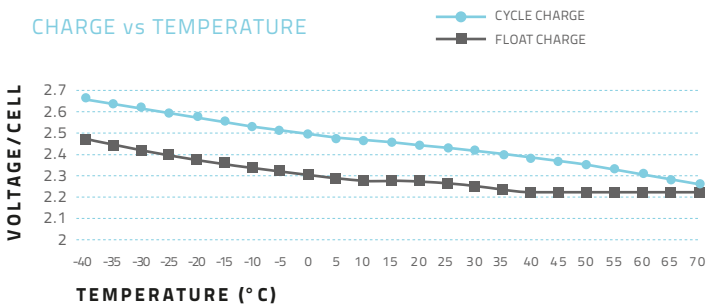

CHARGE vs TEMPERATURE CHART

temperature	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70
Cycle Charge	2.66	2.64	2.62	2.60	2.58	2.56	2.54	2.52	2.50	2.48	2.47	2.47	2.45	2.45	2.43	2.41	2.39	2.37	2.35	2.33	2.31	2.29	2.27
Float Charge (voltage/cell)	2.46	2.44	2.42	2.40	2.38	2.36	2.34	2.32	2.31	2.30	2.29	2.29	2.29	2.27	2.26	2.24	2.23	2.23	2.23	2.23	2.23	2.23	2.23

CONSTANT CURRENT DISCHARGE CHARACTERISTICS: UNITS AMPERES (25°C)

End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	733.92	388.40	234.68	171.09	137.80	78.95	57.34	44.97	38.36	32.60	24.86	20.69	17.37	11.31	9.24
1.67V	682.08	375.68	231.20	169.92	137.56	78.61	56.30	44.74	37.80	32.37	24.82	20.46	17.34	11.27	9.20
1.70V	675.12	369.92	228.88	167.63	136.42	77.92	55.95	44.51	37.22	32.02	24.74	20.46	17.28	11.24	9.19
1.75V	618.48	358.32	226.60	166.48	134.10	76.42	55.72	43.95	36.88	31.79	24.62	20.23	17.20	11.19	9.18
1.80V	554.88	335.20	217.32	161.84	130.64	75.26	55.49	43.82	36.42	31.45	24.51	20.00	17.11	10.81	9.16
1.83V	530.40	307.52	213.88	156.08	124.86	74.57	53.29	41.97	35.61	30.29	23.99	19.19	16.42	10.69	9.04
1.85V	497.04	298.24	200.00	150.29	121.38	71.56	51.91	41.39	34.68	29.29	23.70	18.96	16.18	10.58	8.96

DISCHARGE DATA WITH CONSTANT POWER UNITS: WATTS PER CELL (25°C)


End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	1226.4	682.0	439.2	320.2	257.6	149.1	109.0	86.3	72.9	62.7	48.3	40.0	33.6	22.4	18.4
1.67V	1167.5	671.6	421.5	317.9	257.8	149.1	107.6	86.2	72.9	62.5	48.3	39.9	33.6	22.4	18.4
1.70V	1160.5	667.0	421.3	317.9	255.4	148.0	107.4	85.9	71.8	62.1	48.0	39.5	33.3	22.3	18.4
1.75V	1080.8	658.9	421.8	317.9	254.3	146.8	107.2	85.8	71.6	61.6	47.7	39.3	33.3	22.3	18.3
1.80V	991.8	625.3	412.7	312.1	253.1	146.8	107.0	85.5	71.1	61.6	47.6	39.1	33.3	21.7	18.3
1.83V	957.1	574.5	409.2	302.8	242.7	145.6	104.0	82.6	70.3	59.6	47.6	37.9	32.7	21.5	18.1
1.85V	886.6	561.8	380.3	291.3	235.8	142.2	101.1	81.6	68.3	58.5	45.8	37.6	32.1	21.3	18.0

SPECIFICATION

Nominal Voltage	6V		
Rated Capacity (10 hour rate)	200 AH		
Dimension	Total Height (top of terminal)	230 mm	9.06"
	Height	226 mm	8.90"
	Length	323 mm	12.72"
	Width	178 mm	7.01"
Weight	Approximately 31.5 kg / 69.44 lbs		
Capacity (25°C)	120 hour rate (2.0A)	240 AH	
	20 hour rate (10.8A)	216 AH	
	10 hour rate (20A)	200 AH	
Internal Resistance	Fully charged Battery (25°C)	1.5mΩ	
Self-Discharge (25°C)	Capacity after 3 month storage	95%	
	Capacity after 6 month storage	85%	
	Capacity after 12 month storage	80%	
Max Discharge Current (25°C)	2000A (5S)		
Terminal	Standard	F3	
	Optional		
Charging (Constant Voltage)	Cycle	Initial Charging Current 60A 7.4V / (25°C)	
	Float	6.8V / (25°C)	


CYCLE CHARGE CHARACTERISTIC (25°C)

REGULAR CYCLE CHARGE CHARACTERISTICS 77°F (25°C)

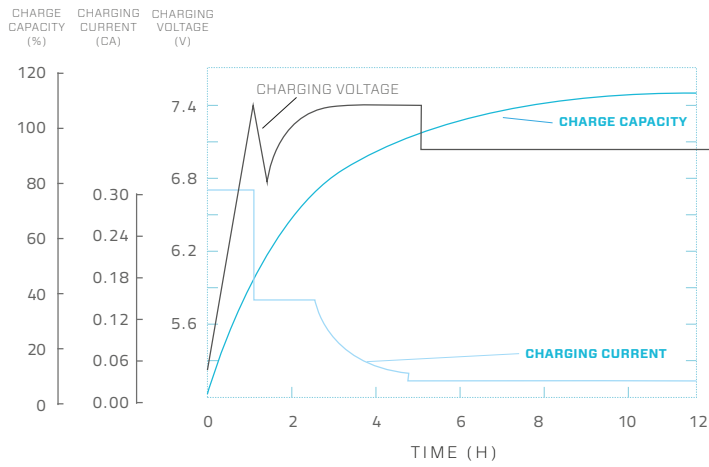


FLOATING CHARGE CHARACTERISTIC (25°C)

FLOATING CHARGE CHARACTERISTICS 77°F (25°C)

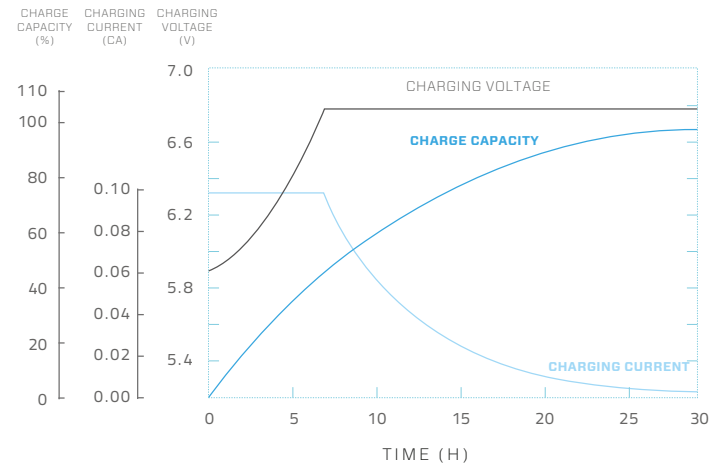


CYCLE LIFE CURVE GRAPH


CYCLE LIFE CURVE GRAPH (25°C)

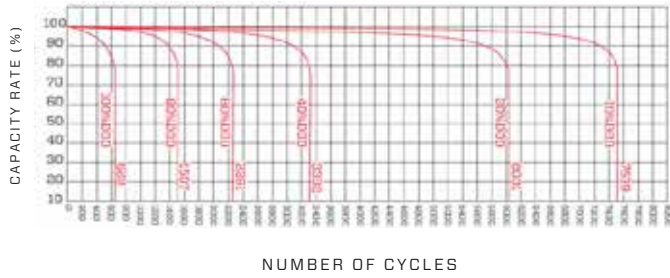


CYCLE LIFE CURVE GRAPH (40°C)

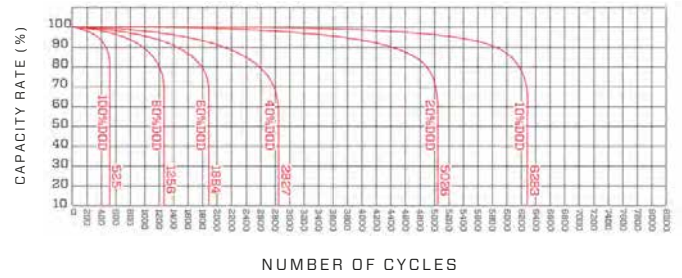

TEMPERATURE & FLOAT SERVICE LIFE

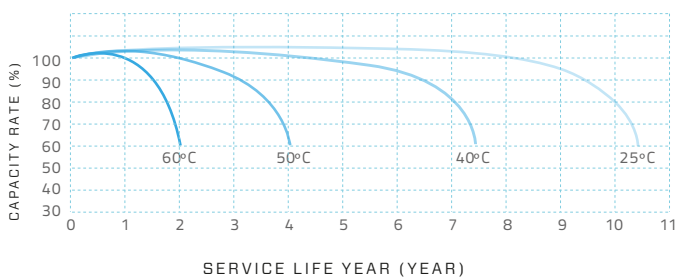

Float Service Life Curve Graph

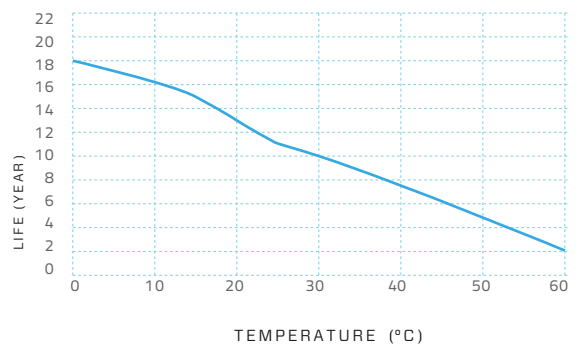

TEMPERATURE & DISCHARGE CAPACITY

